


UN-AU3203

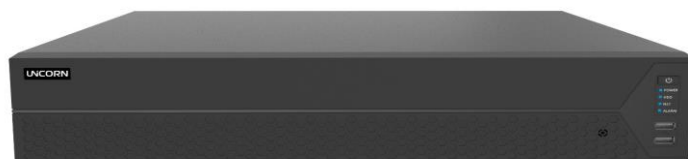

UN-AUXX03 Series		
Model	UN-AU3203	
Operating System	Linux	
Video Audio Input	Voice Talk	1 Channel , BNC port(Line in,2Vpp,1Kohms)
	Network Video Input Bandwidth	200Mbps (The highest 32 Channel 1080P@6M)
	IPC Input	32 Channel
Video Audio Output	VGA	1 Channel ,1920×1080,1280×1024,1280×720,1024×768 Resolution Optional
	HDMI	2 3840×2160, 1920×1080,1280×1024,1280×720,1024×768 Resolution Optional
	Audio Output	1 Channel ,BNC port(Line out,2Vpp,300ohms)
Video And Audio Coding	Audio Encode	G.711A
	Audio Bitrate	64Kbps
Video And Audio Decoding	IP Channel Resolution	Main Stream: The highest 5632×4224 Sub Stream: Not higher than D1
	Video Encode	H.265 (Main Profile@L5.0 High-tie) /H.264(The highest Profile@Level5.0)
	Audio Encode	G.711A, G.726
	Multi-channel Playback	The highest 32-ch synchronous playback
Intelligent Analysis	The Highest Decoding Ability	16 Channel 1080P@30
	4 Channel face detection or 8 Channel Perimeter detection optional	
Others	The highest Support 1080P	
	Voice Talk	Two-way voice talk
	Motion Detection	Each channel support 396(22×18) detection area; Can be set up multi-level sensitivity ,Necessary to support the IPC
HDD	Snapshot	Support JPEG capture
	SATA Port	8
	ESATA Port	1
External Interface	Hard Disk	Unlimited hard disk capacity
	Network Port	2 RJ45 Ethernet port, 10M/100M/1000M suitable
	USB Port	2 USB2.0 port (Front panel provide 1 and back panel provide 1)
	Alarm Input	16 Channel
	Alarm Output	Switching value
		4 Channel
		Relay NO、NC
Structure	RS-232	1 Channel
	RS-485	1 Channel
	Packaging	520x520x215mm
	Dimensions	2U altitude, 441x448x88mm
	Weight	7Kg (Not include hard disk)
	Installation	Rack installation, Desktop installation
	Operation Temperature	0°C-- +55°C
Electrical Performance	Operation humidity	10%--90%
	Power supply	20W(Not include hard disk)
	Power	110V~220V±10% 47Hz~63Hz
	Operation Temperature	0°C-- +55°C
	Operation humidity	10%--90%
	Power supply	20W(Not include hard disk)